

Dongfeng Cummins Technical Operations



ENGINE MODEL: 6BTAA5.9-G2
CURVE & DATASHEET: FR93270

REV 00 26OCT2012



Generator Engine Performance Data

DONGFENG CUMMINS ENGINE Co.,LTD

Xiangfan, Hubei Province, China
<http://www.dcec.com.cn>

Basic Engine Model:

6BTAA5.9-G2

FR93270

FR93270 @ 1500 RPM & 1800RPM

Configuration

D403076GX03

CPL Code

CPL: 3289

Revision

2009/4/15


Compression Ratio:	17.3:1	Aspiration:	Turbocharged and Charge Air Cooled
Bore:	102 mm	Displacement:	5.9 L
Stroke:	120 mm	No. of Cylinders:	6
Emission Certification:	MEP STAGE I	Fuel System:	BYC PB/Electronic Governor
Governor Regulation:	≤3%		

All data is based on the engine operating with fuel system, water pump, and 15.2 in H₂O (3.7 kPa) inlet air restriction with 5.98 in (152mm) inner diameter, and with 3 in Hg (10 kPa) exhaust restriction with 4.02 in (102 mm) inner diameter; not included are alternator, fan, optional equipment and driven components. Coolant flows and heat rejection data based on coolants as 50% ethylene glycol/50% water. All data is subject to change without notice.

Engine Speed	Standby Power		Prime Power		Continuous Power	
	kW	HP	kW	HP	kW	HP
1500	130	174	120	161	96	129
1800	145	194	132	177	TBD	TBD


Engine Performance Data @ 1500 RPM

OUTPUT POWER			FUEL CONSUMPTION	
%	kW	HP	g/kW.h	L/h
STANDBY POWER				
100	130	174	216	34
PRIME POWER				
100	120	161	208	30
75	90	121	207	23
50	60	80	214	16
25	30	40	252	9
CONTINUOUS POWER				
100	56	75	208	24

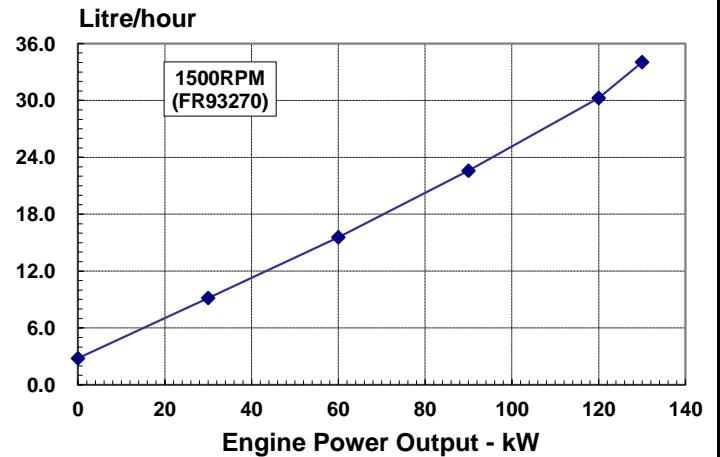

Engine Performance Data @ 1800 RPM

OUTPUT POWER			FUEL CONSUMPTION	
%	kW	HP	g/kW.h	L/h
STANDBY POWER				
100	145	194	215	38
PRIME POWER				
100	132	177	211	34
75	99	133	212	25
50	66	88	223	18
25	33	44	264	11
CONTINUOUS POWER				
TBD	TBD	TBD	TBD	TBD

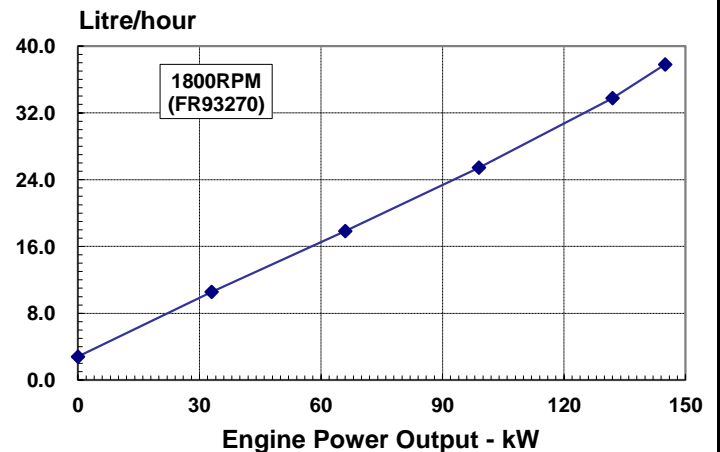

Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with GB/T18297 conditions of 100kPa (29.61 in. Hg) barometric pressure, 25°C (77°F) inlet air temperature, and 1 kPa (0.30 in. Hg) water vapor pressure with No.0 diesel fuel. The engine may be operated without changing the fuel setting up to 2200 m (7218ft.) altitude.

GENERAL ENGINE DATA

Approximate Engine Weight (wet).....	-kg	411
Mass Moment of Inertia of Rotating Components (No Flywheel).....	-kg·m ²	0.25
Center of Gravity from Front Face of Block.....	-mm	391
Center of Gravity above Crankshaft Centerline.....	-mm	140
Fire Order.....		1-5-3-6-2-4

ENGINE MOUNTING

Maximum (Static) Bending Moment at Rear Face of Block.....	-N.m	1356
--	------	------

EXHAUST SYSTEM

Maximum Back Pressure.....	-kPa	10
----------------------------	------	----

AIR INTAKE SYSTEM

Maximum Intake Air Restriction with Heavy Duty Air Cleaner		
— Dirty Element.....	-kPa	6
— Clean Element.....	-kPa	3.7
Minimum Dirt Holding Capacity with Heavy Duty Air Cleaner.....	-g/cfm	53
Maximum Temperature Rise from Ambient to the Inlet of the Turbocharger....	-°C	17
Recommended intake piping size (inner diameter).....	-mm	76

CHARGE AIR COOLING SYSTEM

Maximum Temp. Rise Between Engine Air Intake and Intake Manifold	-°C	25
Maximum Air Pressure Drop from Turbo Air outlet to Intake Manifold		
— 1500RPM.....	-kPa	13
— 1800RPM.....	-kPa	13
Maximum Intake Manifold Temperature Differential (Ambient to IMT) (IMTD)..	-°C	50
Maximum Intake Manifold Temperature for engine protection (Warning Thresh	-°C	58

LUBRICATION SYSTEM

Minimum Engine Oil Pressure for Engine Protection Devices:		
— Idle Speed.....	-kPa	207
— Governed Speed.....	-kPa	345
Maximum Oil Temperature.....	-°C	121
Oil Capacity with OP 9006 Oil Pan : High - Low.....	-litre	14.2 - 12.3
Minimum Required Lube System Capacity - Sump plus Filters.....	-litre	16.4
Angularity of Standard Oil Pan: (Values stated are for intermittent operation only):		
— Front Down.....	-°	40
— Front Up.....	-°	40
— Side to Side.....	-°	40

FUEL SYSTEM

Type Injection System.....		BYC PB Direct Injection
Maximum Restriction at Lift Pump.....	-kPa	13.6
Maximum Allowable Head on Injector Return Line (Consisting of Friction Head and Static Head)		
.....	-kPa	67.7
Total Drain Flow (constant for all loads).....	-litre/hr	30

COOLING SYSTEM

Coolant Capacity - Engine Only.....	-litre	10
Maximum Coolant Friction Head External to Engine...-1800 rpm.....		
	-kPa	35
— -1500 rpm.....	-kPa	28
Maximum Static Head of Coolant Above Engine Crank Centerline.....	-m	14
Standard Thermostat (Modulating) Range.....	-°C	82 - 95
Minimum Pressure Cap.....	-kPa	69
Maximum Top Tank Temperature for Standby / Prime Power.....	-°C	104 / 100

ELECTRICAL SYSTEM

Cranking Motor (Heavy Duty, Positive Engagement).....	-volt	12V	24V
Battery Charging System, Negative Ground.....	-ampere	63	40
Maximum Allowable Resistance of Cranking Circuit.....	-ohm	0.00075	0.002
Minimum Recommended Battery Capacity			
• Cold Soak @ 10 °F (-12 °C) and Above.....	-0°F CCA	800	400

EMISSIONS

Gaseous Emissions per GB 20891-2007, at 1500rpm:

—Weight-Specific NOx.....	g/kW.h	9.2
—Weight-Specific HC.....	g/kW.h	1.3
—Weight-Specific CO.....	g/kW.h	5.0
—Weight-Specific Particulates.....	g/kW.h	0.70

Gaseous Emissions per GB 20891-2007, at 1800rpm:

—Weight-Specific NOx.....	g/kW.h	9.2
—Weight-Specific HC.....	g/kW.h	1.3
—Weight-Specific CO.....	g/kW.h	5.0
—Weight-Specific Particulates.....	g/kW.h	0.54

Fuel Rating Option used for these Data: **FR93270**

Governed Engine Speed.....	-rpm
Engine Idle Speed.....	-rpm
Gross Engine Power Output.....	-kW
Piston Speed.....	-m/s
Friction Horsepower.....	-kW
Engine Water Flow to Engine:.....	-litre/sec.
Intake Air Flow.....	-litre/sec.
Exhaust Gas Flow.....	-litre/sec.
Exhaust Gas Temperature.....	-°C
Air to Fuel Ratio.....	-air:fuel
Radiated Heat to Ambient.....	-kW
Heat Rejection to Coolant.....	-kW
Heat Rejection to Exhaust.....	-kW

STANDBY POWER		PRIME POWER	
1800	1500	1800	1500
750 - 850	750 - 850	750 - 850	750 - 850
145	130	132	120
7.2	6	7.2	6
16.4	12.7	16.4	12.7
2.4	2.0	2.4	2.0
142	120	135	114
401	328	369	295
570	540	540	500
21.0 : 1	20.0 : 1	22.5 : 1	21.5 : 1
20	18	18	16
71	66	63	59
112	94	96	82

ALL DATA CERTIFIED WITHIN 5%

TBD = To Be Decided

N/A = Not Applicable

N.A. = Not Available

All data is subject to change without notice, sorry for inform.

Dongfeng Cummins Engine Co., Ltd.